


Serger Quilt as you Go Baby Quilt Instructions

Disclaimer: We try our utmost to make sure our directions are accurate. However, we cannot guarantee our instructions. Mistakes can be made! If you see an instruction that looks wrong, or there is something you do not understand. email us: info@sewvac1.com. Have fun!



1. Serger setup: Thread serger for a 4-thread overlock stitch. Test with scraps and adjust tension as needed.
2. Now to layer your fabrics: Find your 3 3/4" squares. Take two 3 3/4" backing squares *right sides together*, Top with one 3 3/4" batting square, one dark 3 3/4" square, right side up, one light 3 3/4" square *wrong* side up and second 3 3/4" square batting.
3. Lift presser foot and position fabrics just to the left of the cutting knife. (shaving off a hair of fabric or none at all.) Serge.
4. Open out your fabrics so that the backing fabrics are on the bottom, and the seam is enclosed. Finger press.
5. Now find one each of your 6 3/4" rectangles: one batting, one backing and one *light fabric*.
6. Turn serged squares so that dark square is on top. NOW: Layer one rectangle of backing fabric right sides together underneath the squares. Then layer one rectangle of light fabric right sides together on top of squares, followed by batting. Serge. Open out fabrics and press.
7. Find the other 6 3/4" rectangles: one batting, one backing and one *dark fabric*.
8. Turn the serged piece so that light *rectangle* is along bottom. Layer one rectangle of backing fabric right sides together underneath the squares. Then layer one rectangle of dark fabric right sides together on top of squares, followed by batting. Serge. Open out fabrics and press.
9. Continue adding strips, turning your work clockwise with each addition.
10. When logs are complete, add top and bottom border followed by side borders.
11. Moving to the sewing machine, bind as desired or use method on binding sheet.
12. Add further quilting if desired, but it is not necessary.

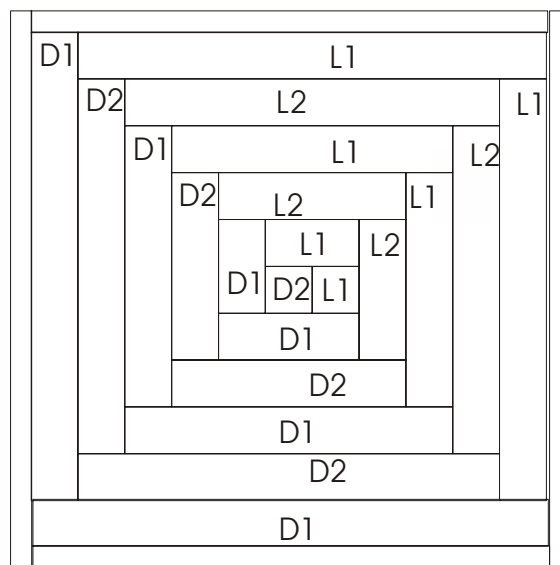

Color to keep track.